



Solder Nail close Type Recommend PCB Layout

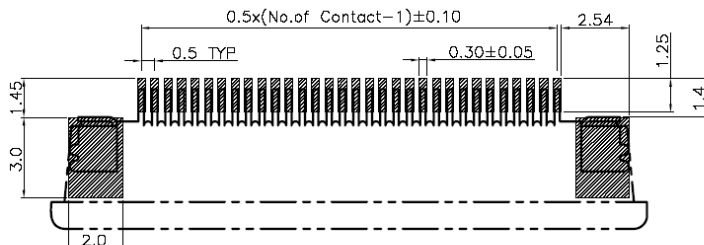

Solder Nail open Type Recommend PCB Layout

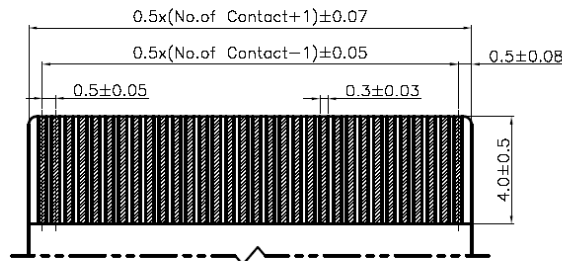











FPC/FFC Dimension Thickness 0.30mm

■ SPECIFICATIONS

- Voltage Rating : 50V AC/DC
- Current Rating : 0.5A AC/DC
- Withstanding Voltage : 200V AC/minute
- Insulation Resistance : 100MΩ min.
- Temperature Range : - 20°C to + 85°C
- Contact Resistance : 20mΩ max.

■ FPC CONNECTOR

- Part No. : 1191D-XX (Right Angle)
- Poles : Close Type : 4~60Pin ; Open Type : 5Pin & 60Pin
- Material : Contact : Phosphor Bronze ; Mat-Tin Plated
Nail : Phosphor Bronze ; Mat-Tin Plated
Housing : LCP6807
Cover : LCP6130
- Q' ty : 2,000 pcs./Reel

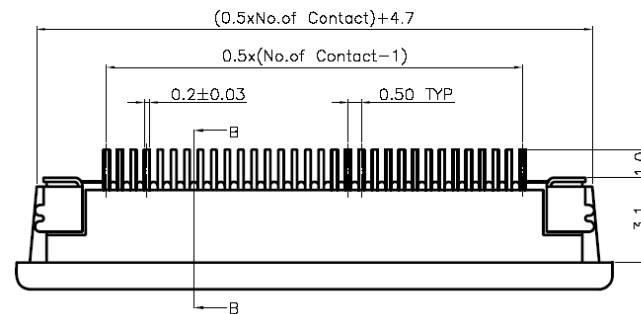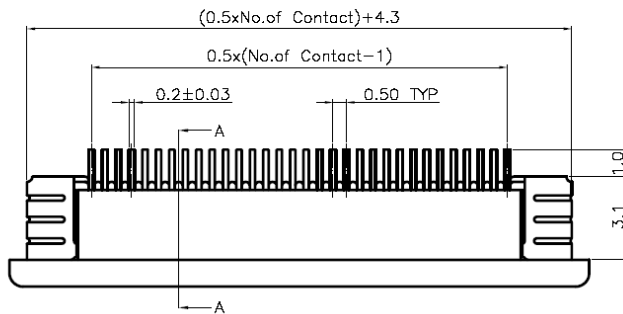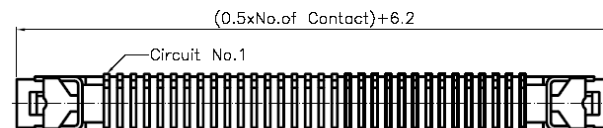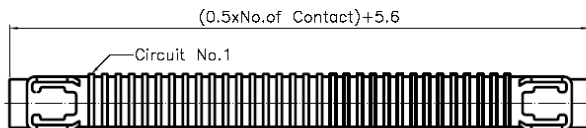

Solder Nail close Type

Solder Nail open Type

HO CHIEN
www.hochien.com

APPROVED BY

林宗

SCALE

UNIT

mm

TOLERANCE

.0 ±0.3

LTR

ECR

REVISION RECORD

200602-002

DATE

06/02/21

LTR

ECR

REVISION RECORD

200805-006

DATE

08/05/14

CHECKED BY

PROJ

VER NO.

.000 ±0.1

ECR

200608-002

06/08/04

ECR

200705-012

07/05/21

DRAWN BY

DATE

SIZE

ALL ±

ECR

200706-023

07/06/29

ECR

DG 200707-006

07/07/30

黃科源

2008/05/14

A4

0° ±

ECR

200802-015

08/02/26

Conforms to The RoHS Instruction

PART NO 1191D-XX
0.5mm Pitch ZIF FPC Connector Bottom Contact Style(SMT)

CUSTOMER
Conforms to The RoHS Instruction