


9111 Series

Hard Metric Connector Male Type A

www.hochien.com

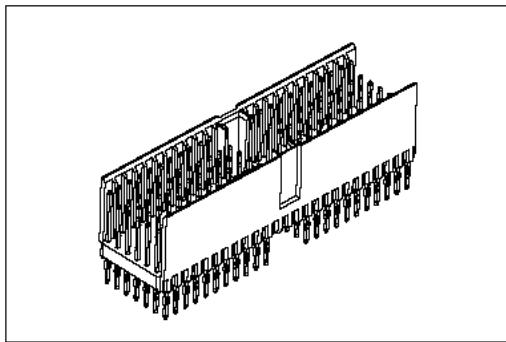

Material:




Housing: 30% Glass Filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:


Current Rating : 1 A.
Dielectric Withstanding Voltage: AC 750V.
Insulator Resistance: 10000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -55°C ~+105°C .

Features:

- * Type A Straight Male.
- 5 X 22 Signal and 44 Ground Shield Contact.

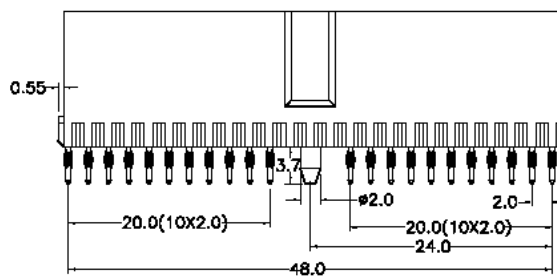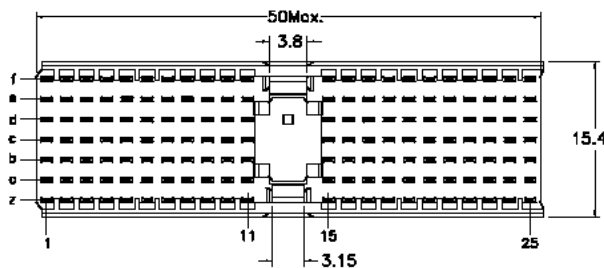

C Option

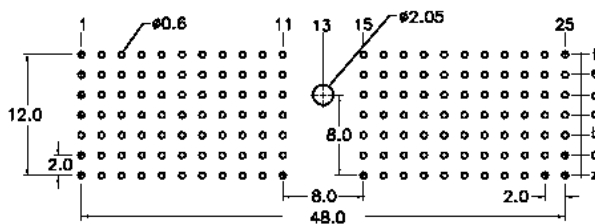

P.C. Board Layout
(Top View)

Coding:

<u>9111</u> -	<u>7</u>	<u>1</u>	<u>A</u>	<u>154</u>	<u>C</u>	<u>C</u>	<u>10</u>	<u>U</u>
Series	7Row	1: Male	A: Type A	Housing Type	C: C Option	C: Dip Tin Contact Gold G: Gold	10: 10 μ m 30: 30 μ m	U: Tube Package