


9111 Series

Hard Metric Connector Female Right Angle

Type A

www.hochien.com

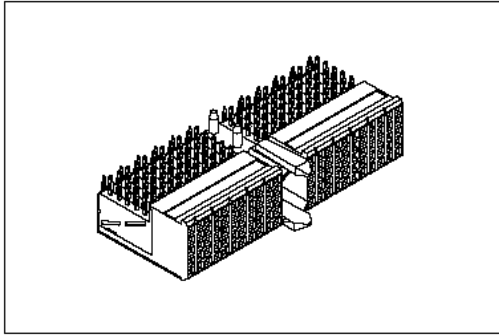

Material:


Housing: 30% Glass Filled PBT UL94V-0.
Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating : 1 A.
Dielectric Withstanding Voltage: AC 750V.
Insulator Resistance: 10000M Ω min.
Contact Resistance: 20m Ω max.
Operating Temperature: -55°C ~ +105°C.

Features:

* A Type Right Angle Female.
5 X 22 Position Fully Loaded.

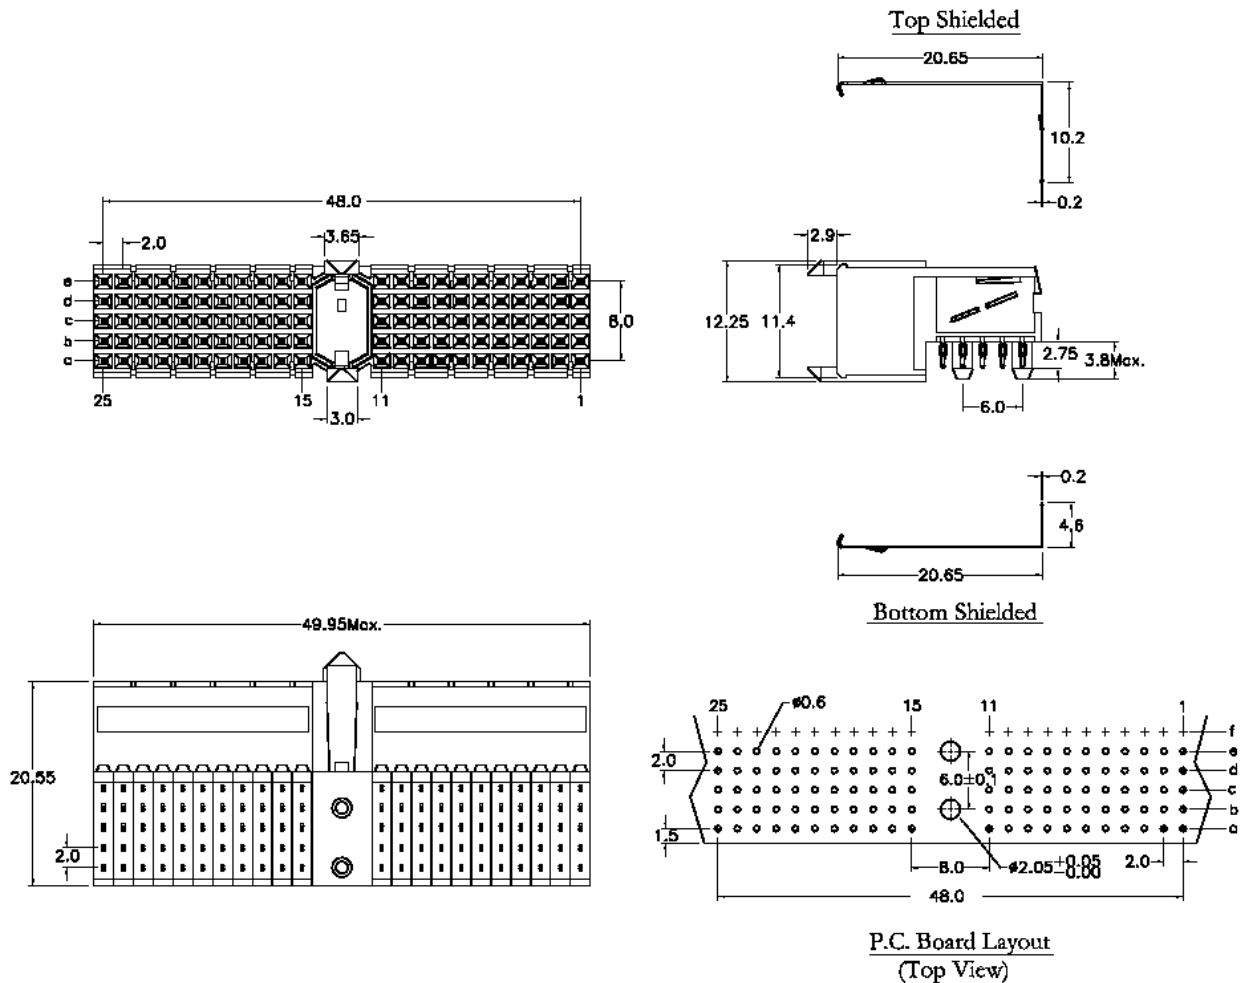

Coding:

<u>9111-</u>	<u>7</u>	<u>2</u>	<u>A</u>	<u>110</u>	<u>1</u>	<u>C</u>	<u>10</u>	<u>U</u>
Series	7Row	2: Female	A: Type A	Position	1: None Shielded 2: Top Body Shielded 3: Top Body Shielded and Bottom Shielded (Packed Separately)	C: Dip Tin Contact Gold	10: 10 μ " 30: 30 μ "	U: Tube Package