


# 9111 Series

## Hard Metric Connector Female Right Angle

### Type B-22

www.hochien.com

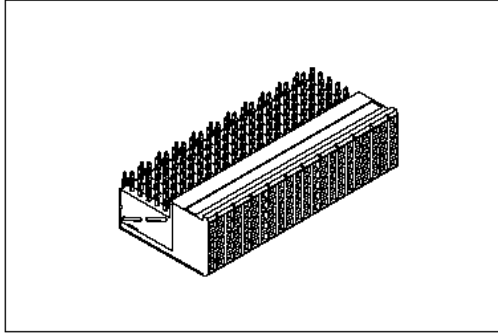

#### Material:


Housing: 30% Glass Filled PBT UL94V-0.  
Contacts: Phosphor Bronze.

#### Electrical Characteristics:

Current Rating : 1 A.  
Dielectric Withstanding Voltage: AC 750V.  
Insulator Resistance: 10000MΩ min.  
Contact Resistance: 20mΩ max.  
Operating Temperature: -55°C ~ +105°C.

#### Features:

- \* B Type Right Angle Female
- 5 X 22 Position Fully Loaded.

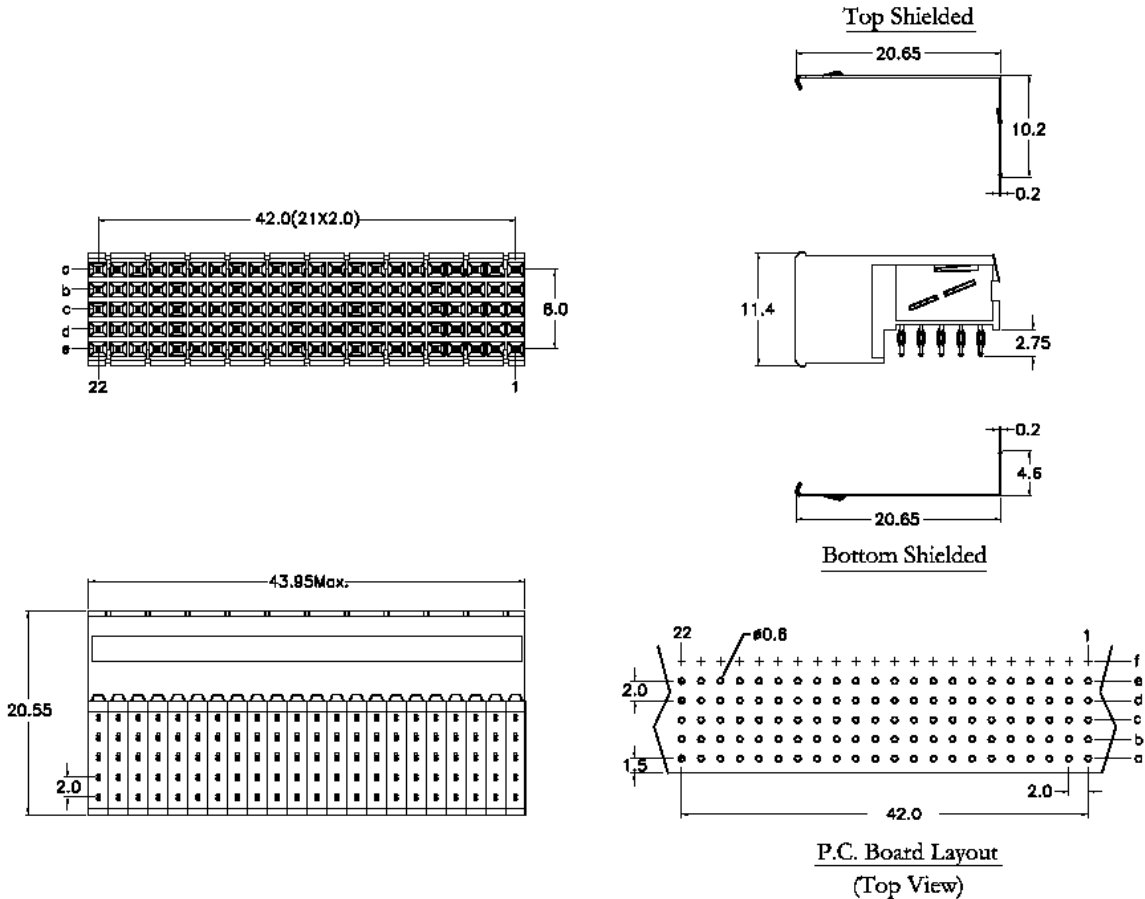

#### Coding:

<u>9111-</u>	<u>7</u>	<u>2</u>	<u>B</u>	<u>110</u>	<u>1</u>	<u>C</u>	<u>10</u>	<u>U</u>
Series	7Row	2: Female	B: Type B	Position	1: None Shielded 2: Top Body Shielded 3: Top Body Shielded and Bottom Shielded (Packed Separately)	C: Dip Tin Contact Gold	10: 10 μ" 30: 30 μ"	U: Tube Package