

HO CHIEN

www.hochien.com



HC**MC**200-500 □ □

□ □ : Poles

500 : Pitch 5.00mm

200 : Standard

MC : Type

Material

Cage clamp: Brass, Ni plated

Contact: Phosphor bronze, Tin plated, 0.4t

Insulating Body: Polyamide 66 (UL94V-0)

Screw: M2.6, steel, Zn plated

Color: Green

Environmental

Operation temperature: -55 ° to 105 °

Short-time temperature: up to 250° (482°)

Electrical

Current rating: 16 Amp AC300V


Insulation Withstands Volt: AC2000V min

Insulation resistance: >5000MO DC500V

Wire strip length: 7mm

Wire range: 14 ~ 24 AWG

Screw torque: 4.5 lb-inch

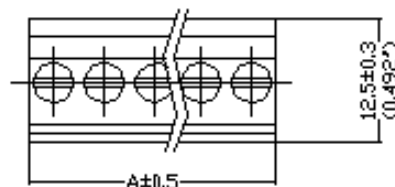

5±0.1 (0.197")

2.5±0.3 (0.098")

