

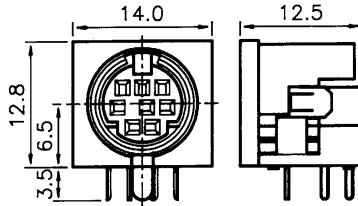


# HO CHIEN

## MINIATURE CIRCULAR CONNECTORS WITHOUT SHIELD TYPE




STANDARD TYPE  
(MDC-023~MDC-028)

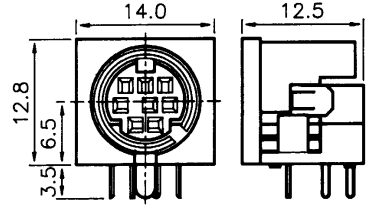


QUICK LOCK TYPE  
(MDC-053~MDC-058)

### Specifications

- Rating: 100V AC 1A MAX or 12V DC 2A MAX
- Insulation Resistance: 50MΩ MIN at 250V DC
- Dielectric Strength: 250V AC/1 minute
- Contact Resistance: 30mΩ MAX
- Insertion Force: 4.5kg MAX
- Withdrawal Force: 0.9kg~3kg

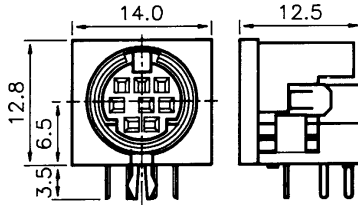

SNAP IN FIT  
TERMINAL TYPE  
(MDC-083~MDC-088)

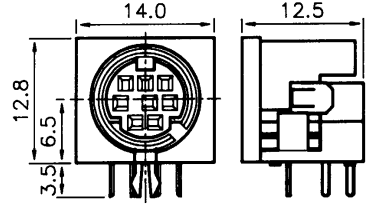

QUICK LOCK & SNAP  
IN FIT TERMINAL TYPE  
(MDC-133~MDC-138)

ARRANGEMENT OF CONTACTS						
NO OF CONTACTS	3	4	5	6	7	8
MODEL NO	MDC-023	MDC-024	MDC-025	MDC-026	MDC-027	MDC-028
MODEL NO	MDC-053	MDC-054	MDC-055	MDC-056	MDC-057	MDC-058
MODEL NO	MDC-083	MDC-084	MDC-085	MDC-086	MDC-087	MDC-088
MODEL NO	MDC-133	MDC-134	MDC-135	MDC-136	MDC-137	MDC-138
HOLE LAYOUT						