

Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


Materials

Contact Material: Phosphor Bronze

Insulation Material: Polyester, UL 94V-0

Nylon 6T

Recommended P.C.Board Layout

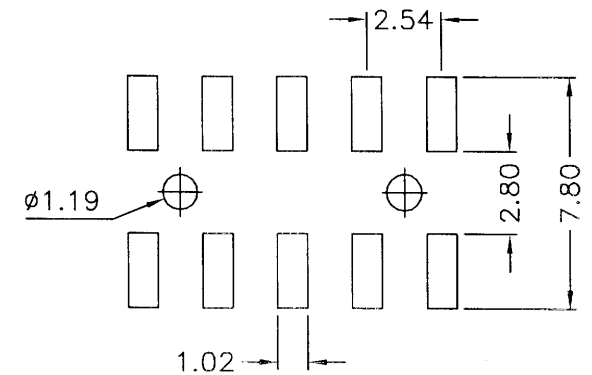

Ordering Information

SCH221 - XX

XX B

No of Pin per row
08 - 40

Contact Plating:
01: Tin
02: Gold Flash

HO CHIEN

www.hochien.com

REV.	01	UNIT	mm	SCALE	4=1	
------	----	------	----	-------	-----	--

GENERAL TOLERANCE

X' ± 5'	.X * ±
X. ± 2'	.X ± 0.38
XX. ± 1'	.XX ± 0.25
XXX. ± 0.5'	.XXX ± 0.13

DRAWN	C-T-Kang
CHECK	K-L-Chen
APPROVE	Z-Y-He

DATE	3-07-00'
DATE	7-18-02'
DATE	7-18-02'

DWG. NO.	SHC221-B01
PART NO.	SHC221- XX XX B 01

TITLE	2.54 FEMALE HEADER DUAL ROW S.M.T TYPE W/POST
-------	---