



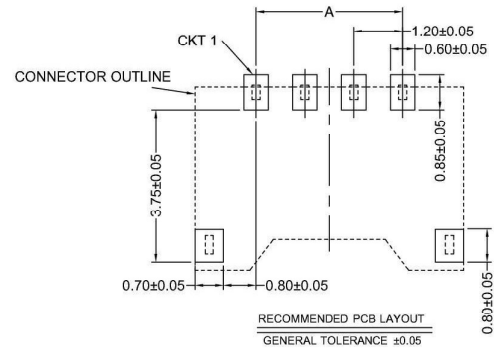
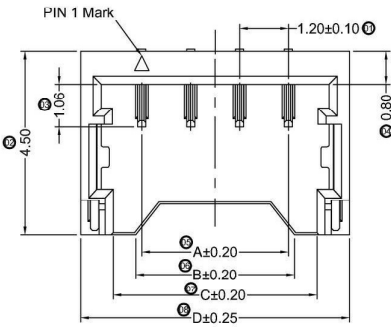



RoHS  Lead-free

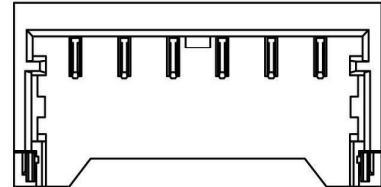

2-5PIN



6PIN

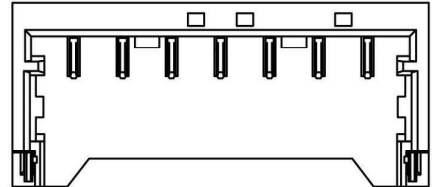

7PIN



■ Specifications :

- Voltage rating: 50V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

Poles	Dimensions(mm)				
	A	B	C	D	E
2	1.20	1.50	2.64	4.20	3.40
3	2.40	2.70	3.84	5.40	4.60
4	3.60	3.90	5.04	6.60	5.80
5	4.80	5.10	6.24	7.80	7.00
6	6.00	6.30	7.44	9.00	8.20
7	7.20	7.50	8.64	10.20	9.40

	LCP UL 94V-0	Brass	Gold-Flash	Brass	Tin Plating Fog	1224H	1,000Pcs
	Nylon 46 UL 94V-0						
	Material	Material(Pin)	Finish(Pin)	Material (Solder Tabs)	Finish (Solder Tabs)	Mates With SWB Housing	Q'ty/Reel

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
1						
2						
3						
4						

GENERAL TOLERANCE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10

Ho Chien
 www.hochien.com

PROJECT 

APPROVAL	CHECK	DRAWN	DATA
----------	-------	-------	------

PART NO. 1224RS-04-V01			
TITLE 1.20mm Crimp Style Connectors			
UNIT MM	SCALE 1:1	NUMBER A-106	REV A