
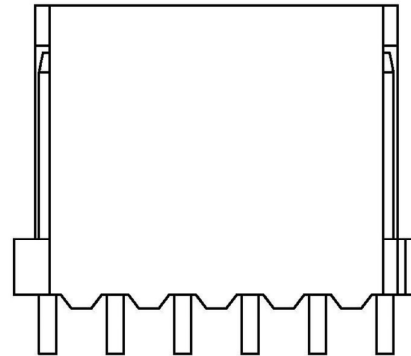



# HSF

NOTES:  
 Rated Current: 3.0AMP  
 Contact Resistance: 20mΩ max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ min  
 Operation Temperature: -25°C to +85°C


Contact Material: Brass  
 Contact plating: Au Or Sn Over Ni  
 Insulator Material: PA66(UL94V-0)

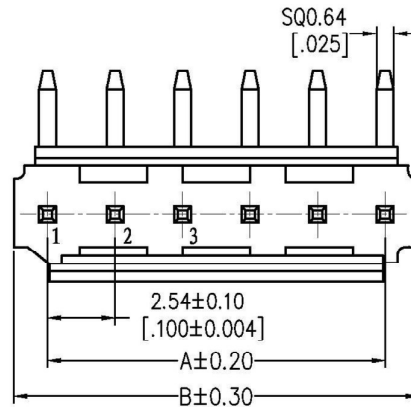


Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)



Scale: 1: 2




2P/3P/4P/5P/6P



7P~20P

Specification & Ordering Information:

Circuit	Part No.	Dimension	
		A	B
02	25330-02	2.54	5.08
03	25330-03	5.08	7.62
04	25330-04	7.62	10.16
05	25330-05	10.16	12.70
06	25330-06	12.70	15.24
07	25330-07	15.24	17.78
08	25330-08	17.78	20.32
09	25330-09	20.32	22.86
10	25330-10	22.86	25.40
11	25330-11	25.40	27.94
12	25330-12	27.94	30.48
13	25330-13	30.48	33.02
14	25330-14	33.02	35.56
15	25330-15	35.56	38.10
16	25330-16	38.10	40.64
17	25330-17	40.64	43.18
18	25330-18	43.18	45.72
19	25330-19	45.72	48.26
20	25330-20	48.26	50.80

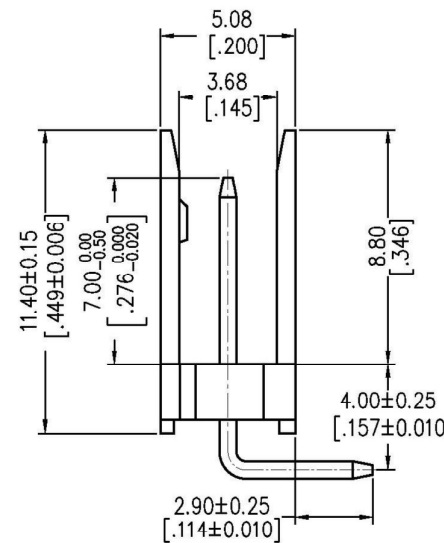

				OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	<b>Ho Chien</b> www.hochien.com
				X.X ±0.40	CHECK	DATE	UNIT	FR	25330-XX	
				X.XX ±0.25		DATE	SIZE	A4	TITLE:	
A0	2012/09/08		NEW	X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	"T" TYPE 2.54 WAFER SINGLE ROW 90°	
REV	DATE		MODIFICATION DESCRIPTION	CHANGE			PROJ.			