



2540 - DX - XX  
 1            2            3

1:Part No.


2:Material:

- 1 -Orange=18 AWG(UL94-V2)
- 2 -Yellow=20 AWG(UL94-V2)
- 3 -Red=22 AWG(UL94-V2)
- 4 -White=24 AWG (UL94-V2)
- 5 -Blue=26 AWG(UL94-V2)
- 6 -Black=All wire sizes in UL94-V0

3: Positions (2~24)

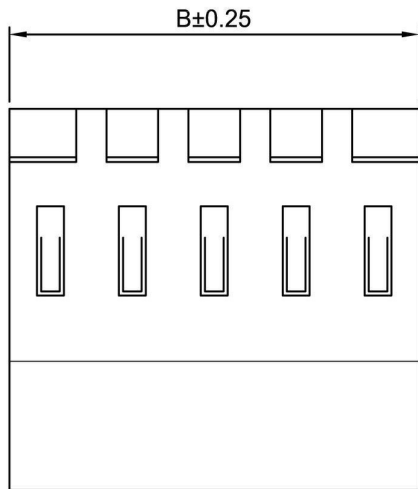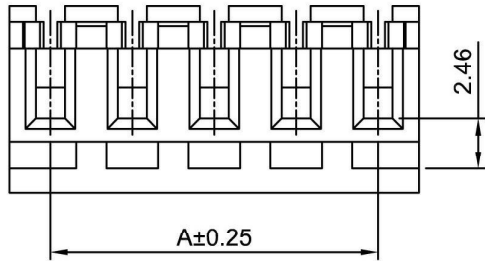

Phosphor bronze/Tin over Nickel

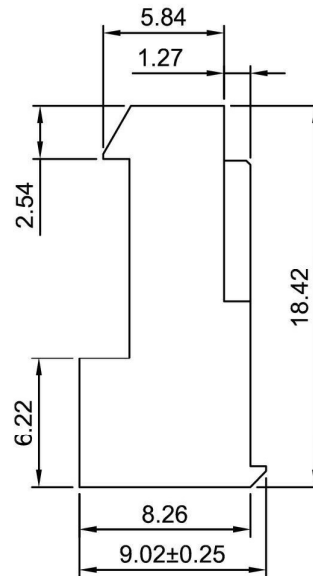

SPECIFICATIONS:

Current Rating: 7A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1500V AC/minute  
 Housing Material: Nylon66 UL 94V-2 ,Orange  
 Terminal Material: Phosphor bronze/Tin over Nickel

Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
2540-DX-02	3.96	7.92	2540-DX-14	51.48	55.44
2540-DX-03	7.92	11.88	2540-DX-15	55.44	59.40
2540-DX-04	11.88	15.84	2540-DX-16	59.40	63.36
2540-DX-05	15.84	19.80	2540-DX-17	63.36	67.32
2540-DX-06	19.80	23.76	2540-DX-18	67.32	71.28
2540-DX-07	23.76	27.72	2540-DX-19	71.28	75.24
2540-DX-08	27.72	31.68	2540-DX-20	75.24	79.20
2540-DX-09	31.68	35.64	2540-DX-21	79.20	83.16
2540-DX-10	35.64	39.60	2540-DX-22	83.16	87.12
2540-DX-11	39.60	43.56	2540-DX-23	87.12	91.08
2540-DX-12	43.56	47.52	2540-DX-24	91.08	95.04
2540-DX-13	47.52	51.48			

Unit: mm

**Ho Chien**

www.hochien.com

Unit	Scale	Sheet
mm	1:1	1 of 1
Draw BY:	Approved :	

Title :  
 3.96mm IDC  
 Closed End Type

DRAW NO : 2540-DX-XX

REV  
 A0

General Tolerance	
x.xx±0.25	ANGLE±
x.xx±0.20	
x.xx±0.15	

REV	DESCRIPTION	DATE