

HSF

NOTES:

Rated Current:3.0AMP.

Contact Resistance:20mΩ Max.

Withstand Voltage:1000V AC/DC


Insulation Resistance:1000MΩ Min.

Operation Temperature:-40℃ to +105℃




Contact Material:Brass

Contact Plating:Au Over Ni

Insulator Material:PBT+30%G.F UL94V-0 BK(std)

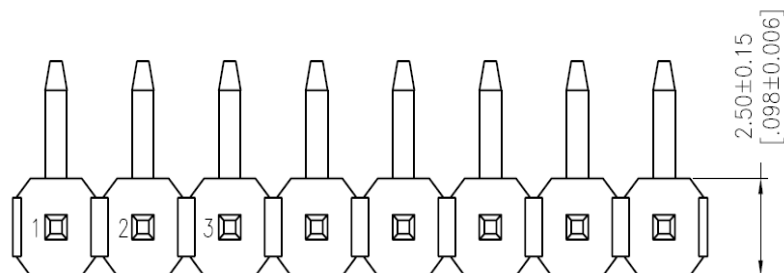

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

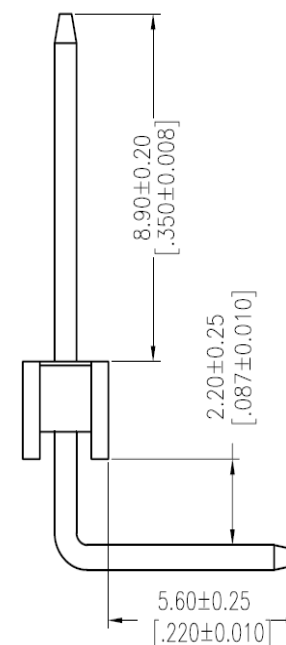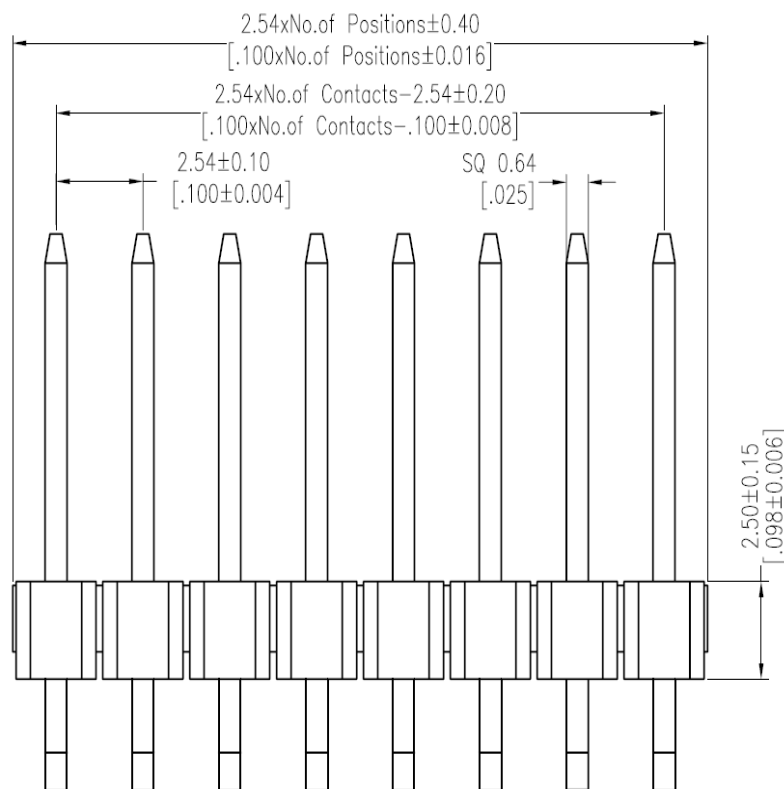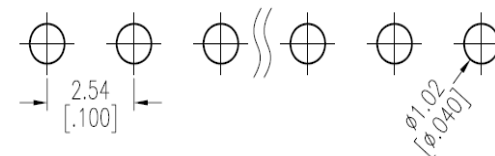

				OPERATION		DRAW	DATE	SCALE	Fit	PART NO.
				X.X	±0.40	William Chen	2012.05.17	UNIT	mm [inch]	2545B-1X36G-01
				X.XX	±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX	±0.15			SHEET	1/1	PITCH 2.54MM RIGHT ANGLE SINGLE ROW 36 POSITION
A0	2012/05/17	NEW	-----	Angle	± 3°	APPROVE	DATE	PROJ.	Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL					

HO CHIEN
www.hochien.com