


WIRE LIST		
<u>CN1</u>		<u>CN2</u>
TIP	RED	OPEN
RING	WHITE	OPEN
SLEEVE	BLACK	OPEN

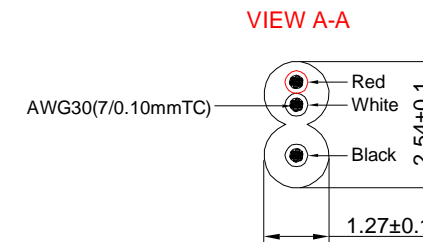


ELECTRICAL CHARACTER:

1. 100 % OPEN&SHORT TESTING
2. WITHSTANDING VOLTAGE:DC 300V 0.1Sec
3. INSULATION RESISTANCE:20M Ohms(Min)
4. CONDUCTIVE RESISTANCE:2 Ohms(Max)

PACKAGING:

10PCS/POLY BAG



③	Outer Mold	PVC 45P WHITE	6g
②	Connector	DC3.5 STEREO PLUG L=26.0mm INSULATION:BLACK SHELL:NICKEL PLATED	1Pcs
①	Cable	NON-UL [AWG30(7/0.10mmTC)*2C+AWG30(7/0.10mmTC)*1C]*2F OD:1.27x2.54mm SILICONE JACKET:WHITE	1Pcs
NO	PART NAME	SPECIFICATION	QTY

A0	新建图档	03/07/2012	Tony	
REV.	DESCRIPTION	DATE	APPVL. BY	ECO(N) NO.
UNIT	MM	DRAW. BY	T.Z	07.20.2012
SCALE	NONE	CHECKED	Tony	07.20.2012
SHEET	1/1	APPVL. BY	SL	07.20.2012

HO CHIEN
www.hochien.com

DWG NAME	CA-B7052-0001 CABLE W/PLUG	DWG NO.	LVL-DWG327
P/N NO.			1200327LP