


PARTS LIST			DESCRIPTION
ITEM NO.	MATERIAL MASTER NO.	QTY. REQD.	
1	MOLEX503110-3000	2	30 PIN CABLE CONNECTOR
2	MOLEX501930-1100	60	CONNECTOR PINS
3		135"	WIRE, HOOK-UP, #28 AWG, BLACK

REVISIONS
REFERENCE ONLY
<small>NOT FOR PRODUCTION/PURCHASING PURPOSES DRAWING UNDER DEVELOPMENT, MAY CHANGE WITHOUT CHANGE TO REVISION LEVEL</small>

INTER-CONNECTING WIRING DIAGRAM	
J1 PIN DESIGNATION	J2 PIN DESIGNATION
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30

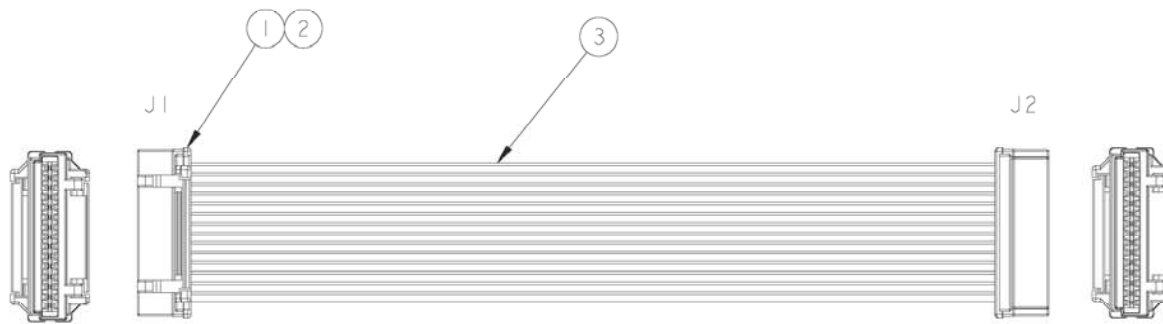

AUTHORIZED COUNTRY	MSA STANDARD SHOP PRACTICES APPLY	JOB NO. (XXXXXXXX)	APPROVAL AGENCY CODE: (N, M, Q, S, H, A, P, E, T, R, O. DOC.: (ex: SK3102-XX)	DO NOT SCALE DWG.
CODE SYMBOLS	CRITICAL Δ	DRAWN BY (Init. Date)	HO CHIEN www.hochien.com CABLE ASSEMBLY, DAVINCI I/O, E6000 TIC	
MAJOR A Δ	MINOR (NO MARK)	CHECKED BY (Init. Date)		
MAJOR B Δ		PROJ. ENGR. (Init. Date)		
100% INSPECTION Δ		QUALITY ASSURANCE (Init. Date)		
TOLERANCES UNLESS OTHERWISE SPECIFIED	FRACTIONAL $\pm 1/64$	MANUFACTURING (Init. Date)	CADD REF: DAVINCI_IO_CABLE	SCALE: 2.000
	2 PL DEC. ± 0.01			
	3 PL DEC. ± 0.005			
	ANGULAR $\pm 1 \text{ deg.}$			
	SEE MSA STANDARD SHOP PRACTICES FOR DRILLED HOLE TOLERANCES			
				SHEET 1 OF 1