


PARTS LIST			
ITEM NO.	MATERIAL MASTER NO.	QTY. REQD.	DESCRIPTION
1	MOLEX 503110-2000	2	20 PIN CABLE CONNECTOR
2	MOLEX 501930-1100	40	CONNECTOR PINS
3		210"	WIRE, HOOK-UP, #28 AWG, RED

REVISIONS
REFERENCE ONLY
<small>NOT FOR PRODUCTION/PURCHASING PURPOSES DRAWING UNDER DEVELOPMENT, MAY CHANGE WITHOUT CHANGE TO REVISION LEVEL</small>

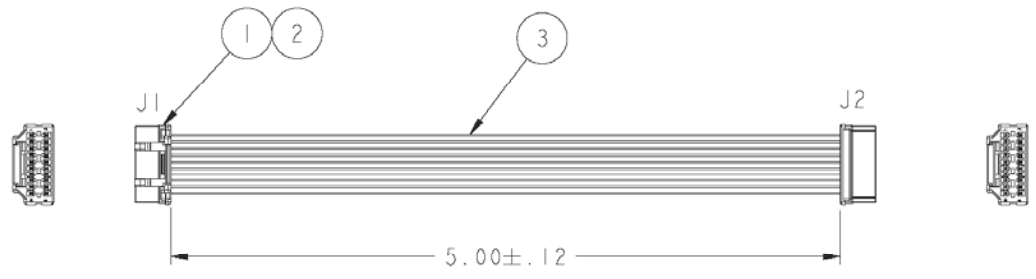

INTER-CONNECTING WIRING DIAGRAM

J1 PIN DESIGNATION	J2 PIN DESIGNATION
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20

LIFECYCLE STATE REVISION

AUTHORIZED COUNTRY	HO CHIEN <i>www.hochien.com</i>		DO NOT SCALE DWG.
	IOR NO. (XXXXXXXX)	APPROVAL AGENCY CODE: (N, M, I, Q, S, R, F, E, T, R). DOC.: (ex: SK3102-XX)	
CRITICAL	MAJOR A MINOR (NO MARK) MAJOR B	DRAWN BY (Init. __Date)	CABLE ASSEMBLY, TAU INTERFACE, E6000 TIC
100% INSPECTION		CHECKED BY (Init. __Date)	
TOLERANCES UNLESS OTHERWISE SPECIFIED	PROJ. ENGR. (Init. __Date)	QUALITY ASSURANCE (Init. __Date)	
FRACTIONAL ± 1/64	MANUFACTURING (Init. __Date)	CADD REF: TAU_INTERCONNECT_CABLE	
2 PL DEC. ± 0.01	SCALE: 1.000		
3 PL DEC. ± 0.005	CA-B7055-0004		
ANGULAR ± 1 deg.	SHEET 1 OF 1		
SEE MSA STANDARD SHOP PRACTICES FOR DRILLED HOLE TOLERANCES			