



HB825-8.25

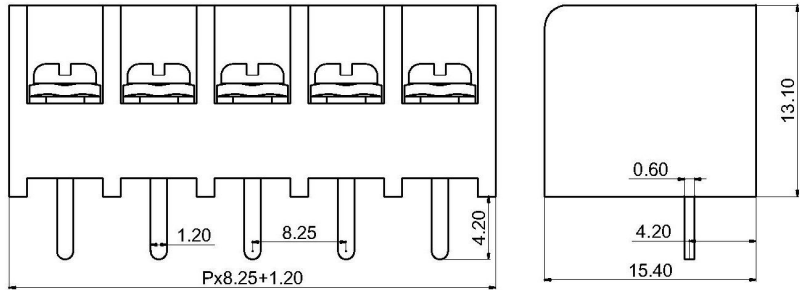

|                                       |                       |
|---------------------------------------|-----------------------|
| <b>Electrical</b>                     |                       |
| Voltage                               | 300V                  |
| Current                               | 20A                   |
| Wire Range                            | 22-12 AWG             |
| Withstanding                          | AC2000V/1Min          |
| <b>Mechanical Property</b>            |                       |
| Torsion Distance                      | 8.0kg.cm              |
| Operating temp                        | -40°C—+105°C          |
| <b>Size</b>                           |                       |
| Spacing                               | 8.25mm                |
| Pole Number                           | 2P-30P                |
| <b>Materials &amp; Electroplating</b> |                       |
| Housing                               | PA66 UL94V-0          |
| Terminal                              | Brass, Tin Plated     |
| Screw material                        | M3.0 Steel, Ni plated |
|                                       |                       |

Order Method:

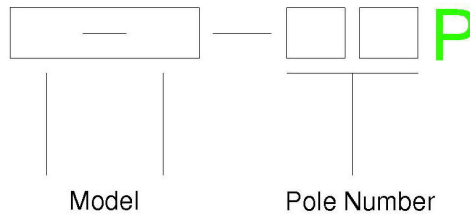

|  |                                    |
|--|------------------------------------|
|  | <b>Ho Chien</b><br>www.hochien.com |
|  | <b>NAME</b> <b>HB825-XXP</b>       |