


(Base Unit : mm)

EC	REV	DESCRIPTION	DATE	APPR.
xxxx	A	INITIAL RELEASE	xx/xx/xx	NT
-	-	-	-	-

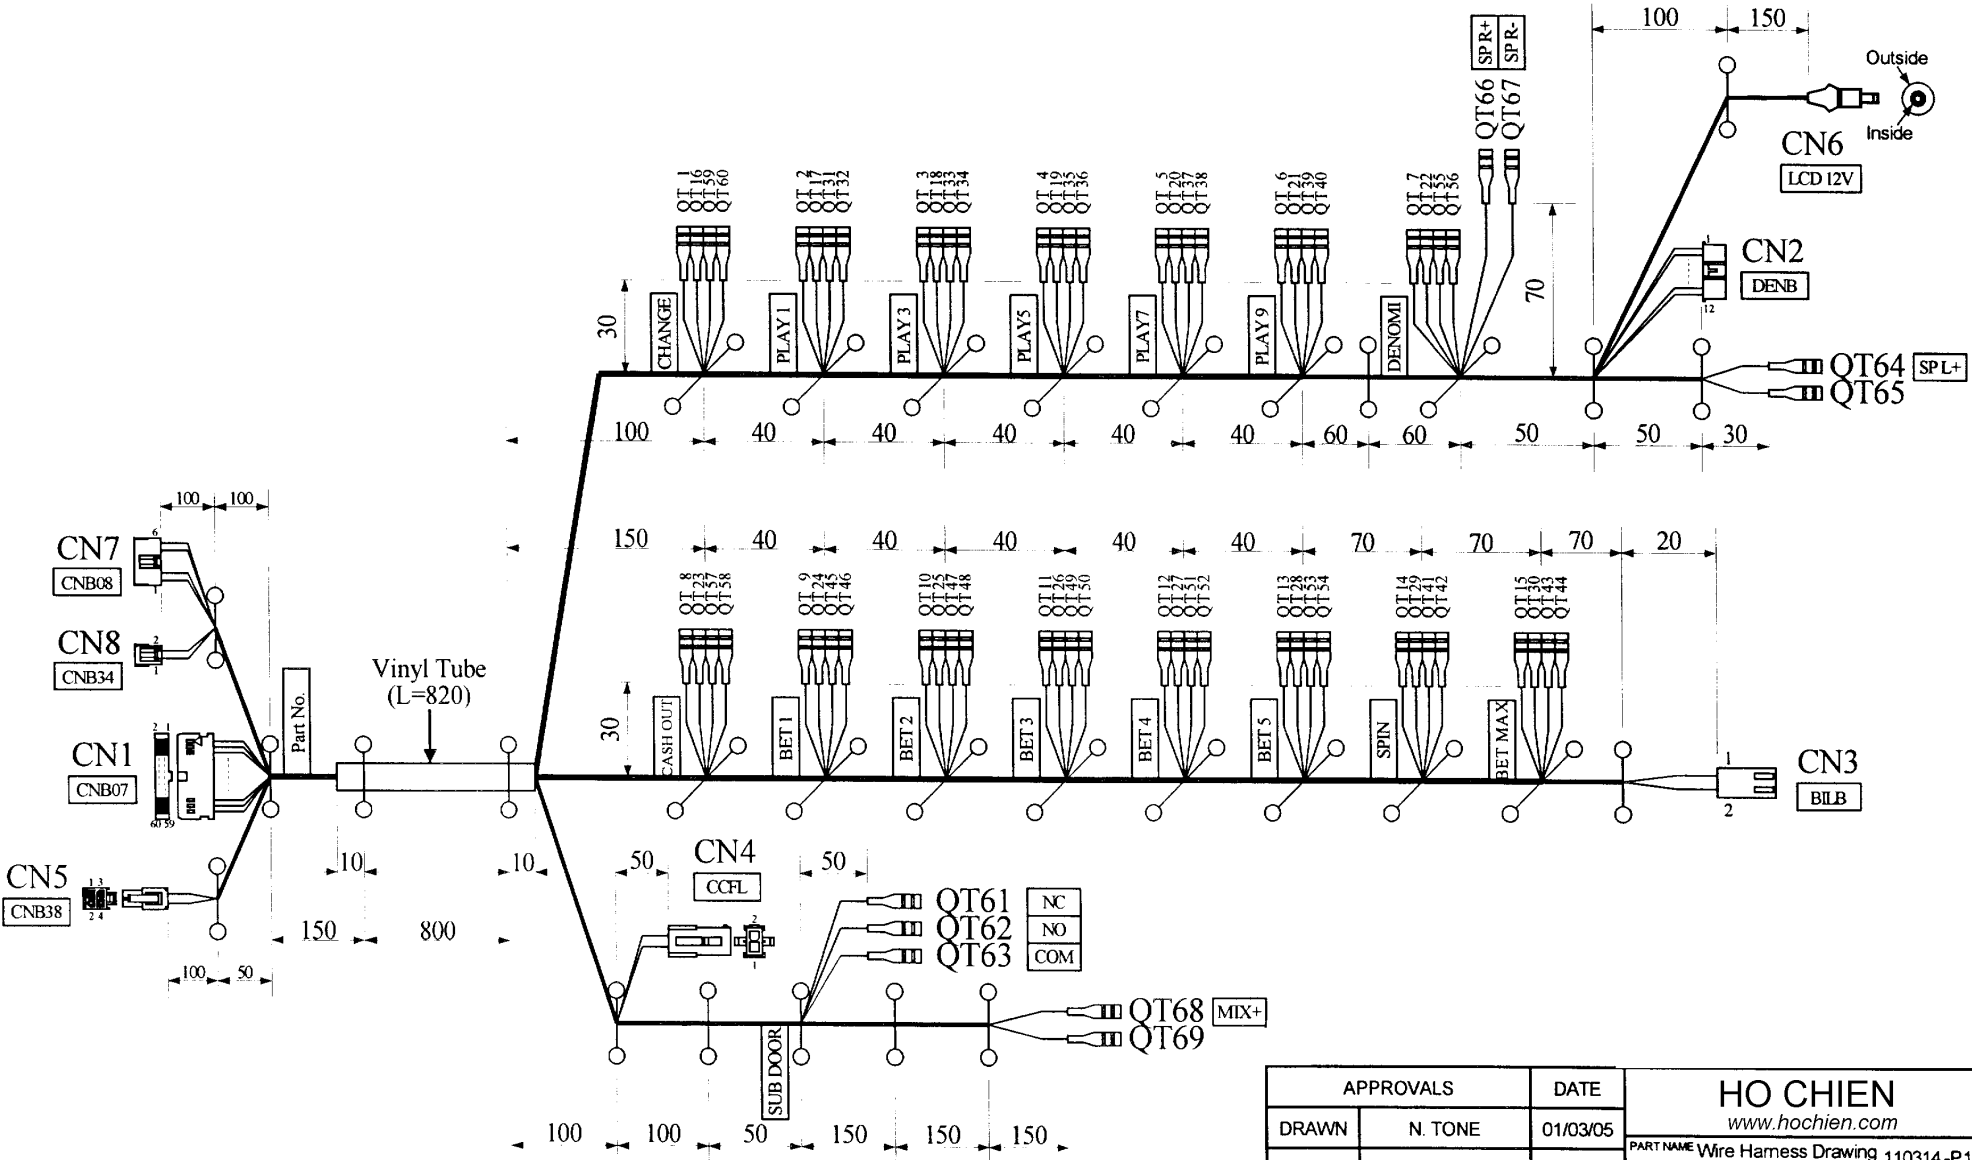

APPROVALS		DATE	HO CHIEN	
DRAWN	N. TONE	01/03/05	www.hochien.com	
CHECK	N. TONE	01/03/05	PART NAME Wire Harness Drawing 110314-P1	
ENGR.	N. TONE	01/03/05	HRNS, KS, DOOR, PLAY BUTTON, 5REEL	
SIZE	B	SHEET	1 OF 2	PART NO
				CA-C1298-0013

(Base Unit : mm)

EC	REV	DESCRIPTION	DATE	APPR.
xxxx	A	INITIAL RELEASE	xx/xx/xx	NT
-	-	-	-	-

Wire assignment

CN1	Wire Color	Connected to	CN2	CN3	CN4	Description
7	Blue / White	Q T31				PLAY 1LINE_SW
8	Blue	Q T32				PLAY 1LINE_LAMP
9	Blue / White	Q T33				PLAY 2LINE_SW
10	Blue	Q T34				PLAY 2LINE_LAMP
11	Blue / White	Q T35				PLAY 3LINE_SW
12	Blue	Q T36				PLAY 3LINE_LAMP
13	Blue / White	Q T37				PLAY 4LINE_SW
14	Blue	Q T38				PLAY 4LINE_LAMP
15	Blue / White	Q T39				PLAY 5LINE_SW
16	Blue	Q T40				PLAY 5LINE_LAMP
19	Green / White	Q T41				SPIN_SW
20	Green	Q T42				SPIN_LAMP
21	Green / White	Q T43				BETMAX_SW
22	Green	Q T44				BETMAX_LAMP
23	Gray / White	Q T45				BET1_SW
24	Gray	Q T46				BET1_LAMP
25	Gray / White	Q T47				BET2_SW
26	Gray	Q T48				BET2_LAMP
27	Gray / White	Q T49				BET3_SW
28	Gray	Q T50				BET3_LAMP
29	Gray / White	Q T51				BET4_SW
30	Gray	Q T52				BET4_LAMP
31	Gray / White	Q T53				BET5_SW
32	Gray	Q T54				BET5_LAMP
33	Green / White	Q T55				DENOMI_SW
34	Green	Q T56				DENOMI_LAMP
35	Green / White	Q T57				CASHOUT_SW
36	Green	Q T58				CASHOUT_LAMP
37	Green / White	Q T59				CHANGE_SW
38	Green	Q T60				CHANGE_LAMP
39	Violet / White		9			INPUT_DENB-0
40	Violet		5			OUTPUT_DENB-0
41	Violet / White		10			INPUT_DENB-1
42	Violet		6			OUTPUT_DENB-1
43	Violet / White		11			INPUT_DENB-2
44	Violet		7			OUTPUT_DENB-2
45	Violet / White		12			INPUT_DENB-3
46	Violet		8			OUTPUT_DENB-3
47	Orange	Q T:1-2-3-4-5-6-7	2			+12V(BUTTON1)
48	Orange	Q T:8-9-10-11-12-13-14-15		1		+12V(BUTTON2)
49	Orange				1	+12V(CCFL)
51	Blue / White	Q T61				BSW_SUB
52	Brown			2		BILL_LED_OUT
53	Blue	Q T62				SW_SUB
55	Black	Q T63				GND(SW)
56	Black / Orange	Q T:16-17-18-19-20-21-22	1			GND(BUTTON1)
57	Black / Orange	Q T:23-24-25-26-27-28-29-30				GND(BUTTON2)
58	Black				2	GND(CCFL)

Wire assignment

CN5	Wire Color	CN6	Description
1	Black	Outside	GND(LCD)
3	Orange	Inside	+12V(LCD)
2			
4			

Wire assignment

CN7	Wire Color	Connected to	Description
1	White *1	QT64	SP L+
2	Black *1	QT65	SP L-
5	White *1	QT66	SP R+
6	Black *1	QT67	SP R-
3			
4			

Wire assignment

CN8	Wire Color	Connected to	Description
1	Red *1	QT68	MIX+
2	Black *1	QT69	MIX-

Connector List

No.	Part No.	Category	Q'ty	Note
CN1	HIF3BB-60D-2.54C (HRS)	Housing (MIL Connector 60P)	1	or EQU.
CN2	XAP-12V-1 (JST)	Housing (XA Connector 12P)	1	
CN3	22-01-1022 (Molex)	Housing (2.5mm Pitch KK Connector 2P)	1	
CN4	39-01-2021 (Molex)	Housing (Mini-Fit, Jr. Connector 2P)	1	
CN5	39-01-2040 (Molex)	Housing (Mini-Fit, Jr. Connector 4P)	1	
CN6	DC-Plug	DC Plug (O.D.=5.5mm, I.D.=2.5mm)	1	
CN7	VHR-6N (JST)	Housing (VH Connector 6P)	1	
CN8	VHR-2N (JST)	Housing (VH Connector 2P)	1	
QT1-QT60, QT64-QT67, QT69	STO-01T-110N (JST)	Quick Terminal (#110-0.5 Receptacle)	65	or EQU.
QT61-QT63, QT68	STO-01T-187N (JST)	Quick Terminal (#187-0.5 Receptacle)	4	or EQU.

- Note -

1 *1; Use UL1061, AWG22.
All others UL1061, AWG24.

APPROVALS		DATE	HO CHIEN www.hochien.com		
DRAWN	N. TONE	01/03/05	PART NAME Wire Harness Drawing 110314-P1		
CHECK	N. TONE	01/03/05	HRNS, KS, DOOR, PLAY BUTTON, 5REEL		
ENGR	N. TONE	01/03/05	SIZE B	SHEET 2 OF 2	PART NO. CA-C1298-0013