


A4

REV.	ECN NO.	REVISIONS	REV.DRAWN	DATE

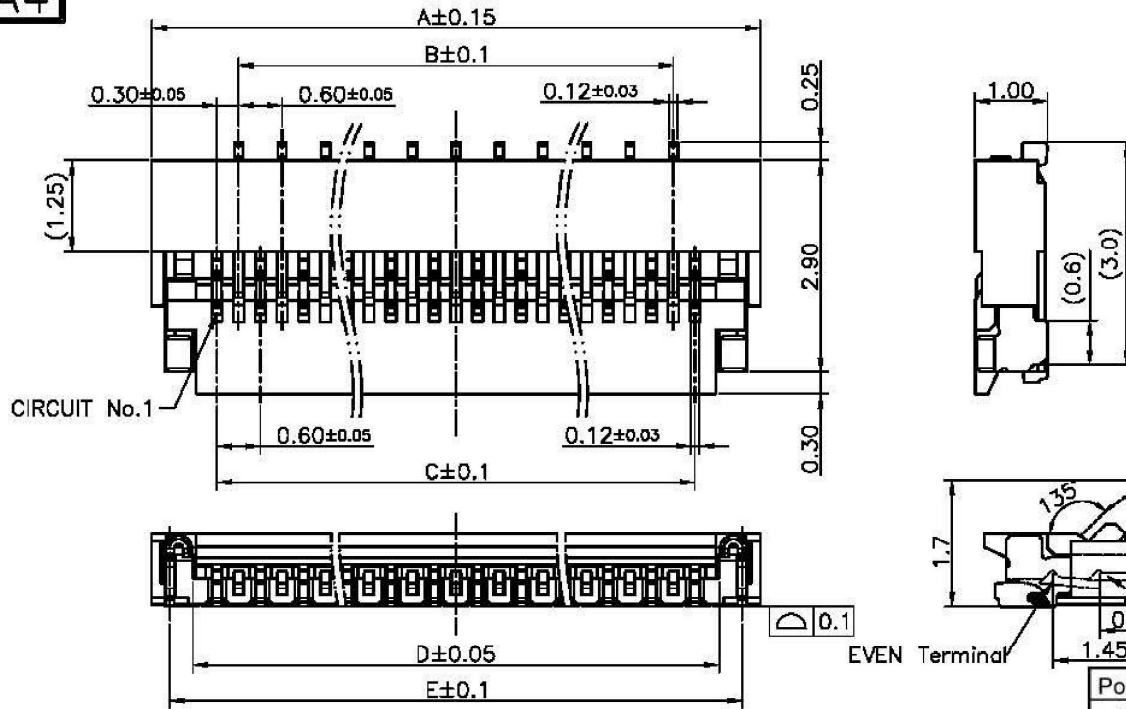

NOTE:


1. MATERIAL:

BASE:LCP UL94-V0 COLOR:NATURE
 ACTUATOR:LCP UL94-V0 COLOR:BLACK
 TERMINAL:COPPER ALLOY (GOLD FLASH)
 SOLDER TAB:COPPER ALLOY (TIN PLATED)


2. PART NO.

JS-0301-XXGO-XX

POLES:9~71
 POLES:9~71 ——— BLANK: NORMAL
 POLES:9~71 ——— NH: HALOGEN FREE
 3. HALOGEN FREE PRODUCT IDENTIFICATION LOGO ON THE PACKING

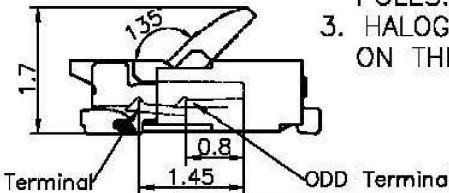

Poles	A	B	C	D	E	Poles	A	B	C	D	E
9	4.20	1.80	2.40	3.03	3.70	33	11.40	9.00	9.60	10.23	10.90
11	4.80	2.40	3.00	3.63	4.30	35	12.00	9.60	10.20	10.83	11.50
13	5.40	3.00	3.60	4.23	4.90	37	12.60	10.20	10.80	11.43	12.10
15	6.00	3.60	4.20	4.83	5.50	39	13.20	10.80	11.40	12.03	12.70
17	6.60	4.20	4.80	5.43	6.10	41	13.80	11.40	12.00	12.63	13.30
19	7.20	4.80	5.40	6.03	6.70	43	14.40	12.00	12.60	13.23	13.90
21	7.80	5.40	6.00	6.63	7.30	45	15.00	12.60	13.20	13.83	14.50
23	8.40	6.00	6.60	7.23	7.90	49	16.20	13.80	14.40	15.03	15.70
25	9.00	6.60	7.20	7.83	8.50	51	16.80	14.40	15.00	15.63	16.30
27	9.60	7.20	7.80	8.43	9.10	57	18.60	16.20	16.80	17.43	18.10
29	10.20	7.80	8.40	9.03	9.70	61	19.80	17.40	18.00	18.63	19.30
31	10.80	8.40	9.00	9.63	10.30	67	21.60	19.20	19.80	20.43	21.10
						71	22.80	20.40	21.00	21.63	22.30

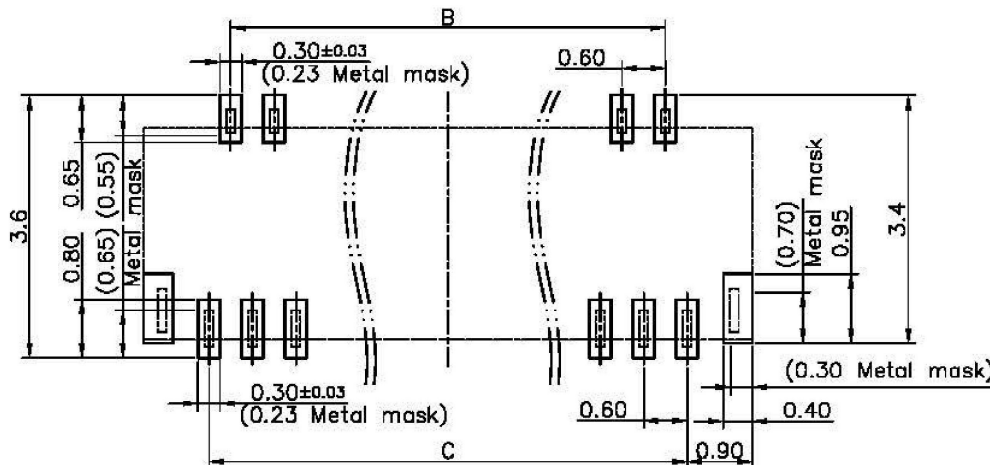

RECOMMENDED P.C.B(MEATL MASK) LAYOUT

GENERAL TOLERANCE: ±0.05(TOP VIEW)

X ± 0.50	X* ± 5.0°	UNITS: mm	NAME(INTENDED USE):	Ho Chien www.hochien.com
.X ± 0.20	.X* ± 2.0°	MATERIAL:	Customer	
.XX ± 0.10	.XX* ± 1.0°	SEE NOTE	PART NO.(INTENDED USE):	TITLE:
.XXX ± 0.05	.XXX* ± 0.5°	FINISH:	JS-0301-XX	0.3mm Pitch<H=1.0mm> ZIF TYPE SMT FPC CONNCTOR
		SEE NOTE	APPO:	DWG NO.:
		Q'TY:	CHKD:	
		SEE NOTE	DR:	

SCALE	SHEET	REV.
10:1	1/2	A