



ZONE	REV	ECO#	DESCRIPTION	DATE	APVD
	A	1987	RELEASE TO PRODUCTION	06-30-04	SLK

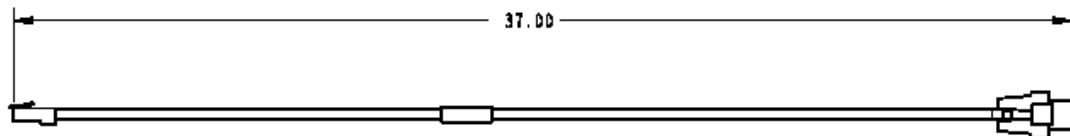

PIN OUT 1:1

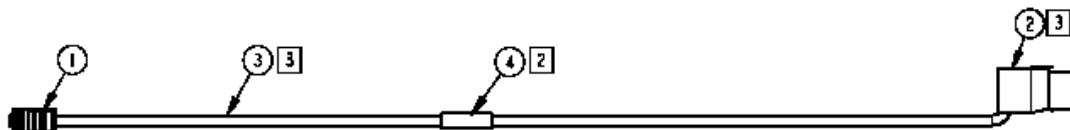

<http://www.hubbell-premise.com/Pdf/HXJ5Exc.pdf>

Ref:

http://kdp.darwinzone.com/Network_Cables.htm

<http://www.duxow.com/faq/network/diff568ab.htm>

http://www.lashan.com/vendors/Leviton/Datacom/FAQ_TIA568.asp

NOTE

1. WIRING AND TUBING USED IN THE CABLE ASSEMBLY MUST BE UL RECOGNIZED.
2. CONNECTORS AND ALL OTHER COMPONENTS MUST BE UL RECOGNIZED OR MADE OF A UL RECOGNIZED MATERIAL WITH A MINIMUM FLAME RATING OF 94V-2.
3. TRACEABILITY OF THE ABOVE MUST BE MAINTAINED BY THE VENDOR AND BE MADE AVAILABLE UPON REQUEST.
4. LABEL CABLE WITH PART NUMBER, REVISION CODE AND DATE OF MANUFACTURE, IN APPROX LOCATION SHOWN.
5. ASSEMBLE ITEM 3 TO ITEM 2 AS SHOWN ON ITEM 2'S LABEL.
6. WIRE ACCORDING TO T568B PER STANDARD ANSI/TIA/EIA-568-A-95.1

4	1*	TUBING, HEAT SHRINKABLE	SUPPLIER
3	AR	CABLE, ETHERNET, CAT 5	SUPPLIER
2	1	CONNECTOR, P/N HXJ5E	HUBBLE
1	1	CONNECTOR, RJ45	AMP

ITEM	QTY	DESCRIPTION	REFERENCE
BILL OF MATERIALS			

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. DECIMALS ANGLES .XX 0.1 .XX' .5" .XXX 0.00 .XX' .5" .XXXX 0.000 DO NOT SCALE DRAWING		APPROVALS DATE DRAWN I HILL 06-30-04 CHECKED SLK 06-30-04 APPROVED TGD REVIEW TITIM		HO CHIEN CABLE, RJ45, MF CATEGORY 5 42-1111 CA-C4037A-0009 REV. A SHEET 1 of 1	
---	--	---	--	---	--

HO CHIEN PN# CA-C4037A-0009

42-1111

AMP 5-5554720-3 RJ45 Connector

Wire in according to T568B

Pin	Color
1	white/orange
2	orange/white
3	white/green
4	blue/white
5	white/blue
6	green/white
7	white/brown
8	brown/white

Confirm current color requirement against current standards for T568B