
## NOTES: 1. INSTALL CABLE TIES AT 8" ON-CENTER EXCEPT AT JUNCTION POINTS THEN ADJUST TO THE LEFT OR RIGHT SIDE ACCORDINGLY. 2. WIRES SHOWN RUNNING 90° TO THE MAIN AXIS OF THE WIRE BUNDLE ARE INTENDED TO BE SEPARATED FROM THE MAIN BUNDLE AT THAT POINT. 3. ALL WIRES SHALL COMPLY WITH ULTYPE AWN, STYLE 1007. 4. FOR GRAPHICAL PURPOSES, ONLY WIRE INTERSECTIONS WITH A CIRCLE ARE CONNECTED. 5. IF THE PART NUMBER CNXCX2104 IS USED FOR CONNECTOR A. THEN SPLICES ARE ACCEPTABLE TO ATTACH IT TO THE HARNESS. CONNECT THE CNXCX2104 BLACK LEAD TO THE BLACK HARNESS WIRE AND CONNECT THE CNXCX2104 WHITE LEAD TO THE YELLOW OR RED HARNESS WIRES. 6. ALL SPLICES SHALL BE SOLDERED AND COVERED WITH .015" MIN THICKNESS SHRINK WRAP. 7. HARNESS SHALL INCLUDE A PERMANENT LABEL INDICATING: PARTNUMBER : BDI-295 DRAWING REVISION: 02 VENDOR IDENTIFICATION: CA-C5046-0002 LABEL SHALL BE LOCATED 1.0" ± .5" FROM CONNECTOR "B". Connector Code LED HOLDER VCC CNXCX21 OR A LED HOLDER VCC CNXCX2104 Housing: Molex 43025-0400 B Molex 43030-0001 or -0007

## HO CHIEN PN# CA-C5046-0002

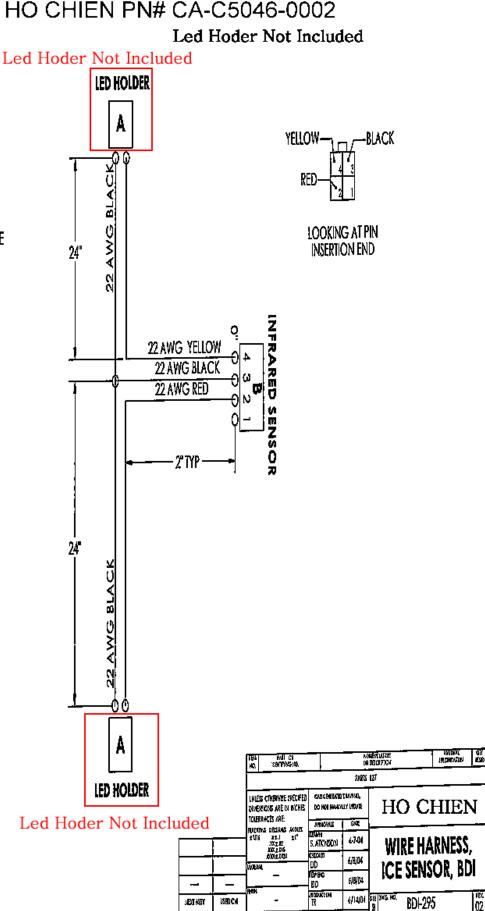

क्षाकाल

WALE 1:1 CADELE FOLKSON

BO NOT SCALE DRAWING

968 I CF 1