


**CONNECTOR SPECIFICATIONS**

**MATERIAL:**

- 1 PIN ----- BRASS
- PIN PLATING ----- TIN
- 2 DIELECTRIC ----- PE
- 3 BODY ----- BRASS
- BODY PLATING ----- NICKEL
- 4 SQ Ø.5 BODY ----- BRASS
- SQ Ø.5 BODY PLATING ----- TIN

**ELECTRO-MECHANICAL:**

- 500 MINIMUM MATING CYCLES
- 75 OHM IMPEDANCE
- 5000 MEGOHM MINIMUM INSULATION RESISTANCE AT 500 VDC
- 500V PEAK VOLTAGE RATING
- 1500V RMS DIELECTRIC WITHSTANDING VOLTAGE
- TEMPERATURE RANGE : -55°C TO +155°C
- VIBRATION, SHOCK & TEMPERATURE CYCLING
- IN ACCORDANCE WITH MIL-STD-1344
- INTERFACE DIMENSIONS SIMILAR TO MIL-C-39012

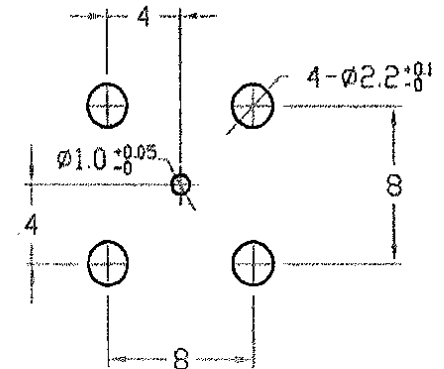

**HO CHIEN** ENTERPRISE CO., LTD.

NO. 6, LANE 130, SEC 1, KUANG FU ROAD, SAN CHUNG CITY, TAIPEI SHIEN, TAIWAN  
 TEL: 886-22-995-3505, FAX: 886-22-995-3167

WWW.HOCHIEN.COM

單位 UNIT	m/m	日期 DATE	2003.01.16
產品名稱 MOD	F-7230	核准 AP	<i>Jerry Fan</i>
圖號 DWG No.		比例 SCALE	2.5:1