

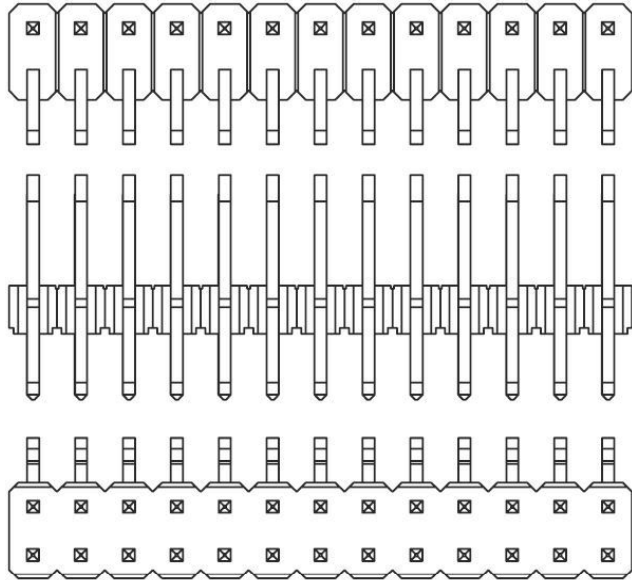


PN# 2522-2X13G-0001
13x2 Pin

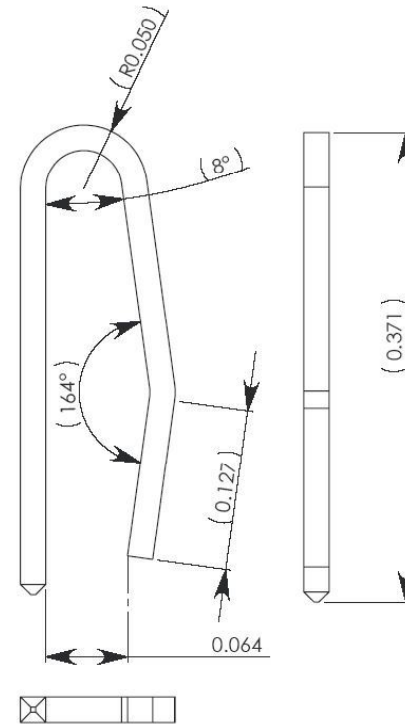

2522 Series

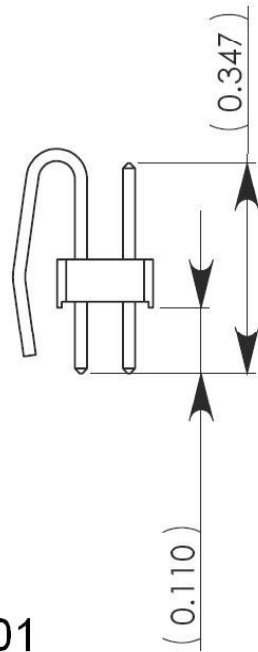

WIRE SIZE 0.5mm x 0.5mm


2522 Series
0.078" x 2.0mm Center Un-shrouded Header Strip; Dual Row

Material:
Contact: Phosphor Bronze
Contact Plating: Gold over 0.000100" Nickel Under plating
Insulator: PBT & 30% glass fiber reinforced thermo plastic; rated UL94V-0
Insulator Color: Black
Mini Jumper: 2516 07 Series

Electrical:
Current Rating: 1 Amp Max.
Contact Resistance: 20 Milli ohms. Max.
Insulation Resistance: 5000 Meg ohms Min. DC 500V
Dielectric Strength: 500V AC
Operation Temperature: -55oC to +140oC

Other size refer to : <http://www.hochien.com/2522.html>

8x2 Pin PN# 2522-2X8G-0001

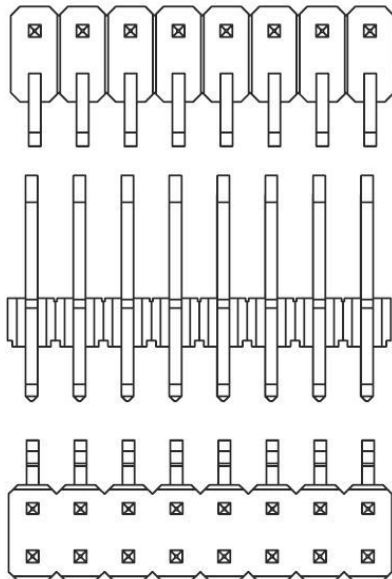

SCALE - 10:1

HO CHIEN
www.hochien.com

2.00 mm Custom Header

REVISION HISTORY			
REV.	DESCRIPTION	DATE	INIT.
A	CREATED	01APR10	JCR

DIMENSIONS IN INCHES
TOLERANCES IN INCHES:
ANGULAR: +/- 1/2 DEGREE
TWO PLACE DECIMAL: +/- 0.01
THREE PLACE DECIMAL: +/- 0.003

MATERIAL:
PHOSPHOR BRONZE
5u GOLD PLATING

PN:

SLDPRT:
SLDDRW: